



LAWRENCE  
LIVERMORE  
NATIONAL  
LABORATORY

LLNL-JRNL-461265

# Observation of amplification of light by Langmuir waves and its saturation on the electron kinetic timescale

R. K. Kirkwood, Y. Ping, S. C. Wilks, N. Meezan, P. Michel, E. Williams, D. Clark, L. Suter, O. Landen, N. Fisch, E. O. Valeo, V. Malkin, D. Turnbull, S. Suckewer, J. Wurtele, T. L. Wang, S. F. Martins, C. Joshi, L. Yin, B. J. Albright, H. A. Rose, K. J. Bowers

October 28, 2010

Journal Of Plasma Physics

## **Disclaimer**

---

This document was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor Lawrence Livermore National Security, LLC, nor any of their employees makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or Lawrence Livermore National Security, LLC. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or Lawrence Livermore National Security, LLC, and shall not be used for advertising or product endorsement purposes.

**Observation of amplification of light by Langmuir waves and its saturation on the  
electron kinetic timescale**

R. K. Kirkwood, Y. Ping, S. C. Wilks, N. Meezan,

P. Michel, E. Williams, D. Clark, L. Suter, O. Landen

Lawrence Livermore National Laboratory

N. Fisch, E. O. Valeo, V. Malkin, D. Turnbull, S. Suckewer

Princeton University

J. Wurtele,

UC Berkeley

T. L. Wang, S.F. Martins, C. Joshi

UCLA

L. Yin, B. J. Albright, H. A. Rose, K. J. Bowers

LANL

Experiments demonstrate the  $\sim 77 \times$  amplification of 0.5 to 3.5 ps pulses of seed light by interaction with Langmuir waves in a low density ( $1.2 \times 10^{19} \text{ cm}^{-3}$ ) plasma produced by a 1 ns, 230 J, 1054 nm pump beam with  $1.2 \times 10^{14} \text{ W/cm}^2$  intensity. The waves are strongly damped ( $k\lambda_D = 0.38$ ,  $T_e = 244 \text{ eV}$ ) and grow over a  $\sim 1 \text{ mm}$  length, similar to what is experienced by scattered light when it interacts with crossing beams as it exits an ignition target. The amplification reduces when the seed intensity increases above  $\sim 1 \times 10^{11} \text{ W/cm}^2$  indicating that saturation of the plasma waves on the electron

kinetic time scale ( $< 0.5$  ps) limits the scatter to  $\sim 1\%$  of the available pump energy.

The observations are in agreement with 2D PIC simulations in this case.

PACS: 52.38.Bv, 52.35.Mw

## **Introduction**

The amplification of light by seeded stimulated Raman scattering (SRS) is important for the development of laser driven inertial confinement fusion. Uncontrolled amplification of light leaving the target can limit the coupling efficiency in indirect drive targets [1]; in addition, an appropriate choice of beam and plasma conditions promises to produce higher power and improved focal quality beams via the combined processes of plasma amplification and pulse compression [2, 3, 4]. Previously, this effect was demonstrated [5] but its observed saturation properties have eluded explanation [6,7], in part because of the possibility that ion wave processes occurred in experiments with long pulse lengths [8-12] which could have masked the effect of electron kinetic saturation processes. However, since ignition targets are expected to have conditions unfavorable for ion wave growth ( $k_{\perp D} = > \sim 0.5$ ) the electron kinetic processes are expected to be the dominant ones [6,7] in determining the saturated scattered power. In this paper, we describe experiments that demonstrate the amplification of a seed of long wavelength light by a single crossing pump beam on an ultra-short ( $< 3.5$  ps) time scale during which electron kinetic effects, such as wavefront bowing and particle trapping, can saturate the waves, and verify the expected scattered power predicted by 2D VPIC. The experiment used a single crossing pump beam to emulate key aspects of the conditions in indirect

drive ignition targets where the scatter produced by individual beams in the target interior is re-amplified by the many crossing beams it encounters as it exits the target, as shown schematically in figure 1. In particular for the ignition target described in Ref. [13] a linear analysis of the re-amplification of SRS shows that each of 23 quads of crossing beams acting alone in a plasma with  $k_{\perp D} \sim 0.65$  can re-amplify the scatter produced in the interior with a gain exponent in the range of 0.1 to 0.6 depending on details of plasma and beam conditions. Thus, in the absence of wave saturation, a linear re-amplification by all beams could result in 10x to  $>\sim 100x$  more scattered power than is predicted by conventional single beam analysis of ignition targets [14]. This work demonstrates the accuracy of a model of the re-amplification of SRS, and the non-linear effects that can limit the overall power scattered under similar conditions. This is the first model for Raman scattering by multiple beams, and establishes that the low gain re-amplification of broadband seeds by multiple pumps at large angles, can be saturated by electron kinetic wave non-linearities at much lower beam intensities than with SRS from single beams alone [15,16] which is expected to allow enhanced performance in future ignition target designs.

In this paper we report the demonstration of the amplification of a 0.5 and 3.5 ps duration seed of broad spectrum light by interaction with a single crossing pump beam in a strongly damped plasma ( $k_{\perp D} = 0.38$ ) where the amplitude gain exponent is small ( $\sim 2$ ), and on a time scale that does not allow ion wave instabilities, and demonstrate, for the first time such conditions, a non-linear, electron kinetic, saturation of the amplification that is captured in 2D VPIC simulations. The shortest pulse used allows the ion waves involved in secondary decays to undergo no more than 1 radian of oscillation ( $\omega\tau_{\text{pulse}} \sim$

1) so they are un-able to saturate the SRS Langmuir waves as expected for ignition targets, which may also be affected by enhanced beam spray and turbulence associated with a larger number of crossing pumps.

## **Experimental Design**

The experiments were performed at the Jupiter laser facility with a 230 J, 1054 nm pump beam with a 1 ns pulse length, and a  $< \sim 6$  mJ, @ 3.5 ps, seed beam incident on a gas jet target. The f/10 pump beams focal spot was 500 micron FWHM diameter, smoothed with a phase plate and it was intersected by the f/25 seed beam propagating  $11^\circ$  away from counter-propagating, with the best focus placed  $\sim 12$  mm after the point of intersection with the pump, so that the two beams had approximately equal spot sizes in the intersection region. The beams intersected for a distance of 3 mm along either direction of propagation. A He gas jet was used as described in Ref.s [3,17] and produced a gas profile with a flat top region of  $\sim 1.5$  mm. Simulations with the Hydra code [18] of the beam incident on an initially uniform gas show a uniform plasma forms across the profile of the spot, with the electron temperature reaching a peak value of 244 eV near the end of 1ns pulse. The 2D simulations also show that the axial profile of the density is sufficiently uniform ( $\delta n/n < \sim 5\%$ ) to keep the two beams well within the half width of the peak of the resonance with the Langmuir waves, over the  $< \sim 1.5$  mm of the plateau region of the gas jet and for the duration of the 1 ns pump pulse. To achieve these conditions in the experiments the gas pressure of the jet was adjusted to maximize the observed seed amplification near 1220 nm, as is consistent with the peak electron density in the interaction volume being  $1.2 \times 10^{19} \text{ cm}^{-3}$ . The resonant region of the profile was

confirmed with 2D interferometric images that showed the density, and hence Langmuir wave frequency, varying by less than the half the resonance width in a region of 1 to 1.5 mm. The seed beam is created by a 1054 nm, short pulse beam passed through a Raman gas cell filled to 150 psi with N<sub>2</sub>O to produce the 1100 to 1300 nm spectrum shown in figure 2, with a pulse length chosen to be either 0.5 or 3.5 ps as measured by an auto-correlator. The data in figure 2 is acquired by a spectrometer coupled with an optical fiber to pick off a portion of the seed beam as it leaves the interaction region. The transmitted seed beam is also diagnosed by a 1D CCD array, filtered with a 1165 nm to 1235 nm band pass filter, imaging the 500 micron seed spot in the center of the interaction region, and providing a 1D slice of the transmitted intensity transverse to the plane of the two beams as shown in figure 3. The remainder of the energy is collected by a calorimeter, which was used, on seed only shots to calibrate the other instruments.

## **Experimental Results**

Each figure also shows data from experiments with the seed beam only (no plasma) and the pump beam only (with plasma), at the same intensities and conditions. The spectral trace from the 'seed only' experiment is increased by 10 x relative to the pump+seed case in figure 2 to clearly show that the plasma amplifier both enhances and narrows the seed spectrum relative to the 'seed only' case, which is consistent with Raman amplification in the uniform plasma region. The spectrum of un-seeded SRS from a 'pump only' experiment at the same pump intensity is also shown in figure 2 which demonstrates that the energy produced by un-seeded SRS is much less than the output seed energy and does not contribute significantly to the observed amplification. The focal

spot profile data shown in figure 3, also demonstrates amplification of the seed by the pump. The observed amplification is not found to depend strongly on the timing for the seed between 200 ps and 900 ps in these experiments. The profile of the amplified seed shows greater enhancement near the center of the beam however, which is consistent with greater amplification where pump intensity is highest. Further the fact that the amplified seed profile is not broader than the spot profile of the ‘seed only’ case demonstrates that at the pump intensities studied in this work filamentation does not occur sufficiently to cause significant beam spray [2,3], so the un-amplified transmitted energy is very close to the incident energy with the residual difference due mostly to plasma absorption. Inverse bremsstrahlung absorption in the plateau region of the plasma is  $< 5\%$  of the incident energy and does not significantly affect the amplification factor.

To study the response of the Langmuir waves responsible for the amplification of light on this time scale, a series of experiments were performed both with 3.5 ps and 0.5 ps seeds with the input seed power (energy) varying from  $8 \times 10^6$  to  $2 \times 10^9$  W. The amplification factor was calculated from the spectral and spot profile measurements as the ratio of the fluence or spectral density transmitted in the ‘pump+seed’ case (after subtracting that measured in the ‘pump only’ case as a baseline) to that transmitted in the ‘seed only’ case. The spectral amplification was determined at the wavelength of the peak values of the spectrally resolved energies for the three cases and found to be as high as 77 x for the 3.5 ps seed with an incident power of  $8 \times 10^6$  W and greatly reduced or absent for incident powers ranging from  $4.5 \times 10^8$  to  $1.6 \times 10^9$ , The amplification factor was also measured from the spot profile data and was found to track the spectral



amplification factor in the cases studied. If the waves were responding linearly to the ponderomotive force, the amplification factor would be expected to be independent of the seed power [19]. However, the data clearly shows the amplification factor to be non-linearly reduced, or saturated, at seed powers  $> 1 \times 10^8$  W, becoming negligible at  $4.5 \times 10^8$  W, and either fluctuating or slightly increasing at the highest powers studied as shown in figure 4, demonstrating the non-linear saturation of the wave response and/or reduced coherence of the fields at high seed intensity. Moreover, we estimate the linear SRS gain rate for the simulated experimental conditions and a 1.2 mm interaction length as shown by the line in figure 4, and find that the observed amplifications, especially at the highest seed intensity, are well below this value, which is also consistent with non-linear effects reducing the wave response and scatter when the seed is large. The maximum transmitted energy in the 3.5 ps seed in these cases is  $< \sim 14$  mJ, and the associated energy deposited in the plasma wave is calculated to be only  $< 1.4$  mJ. Hence, the total energy removed from the pump is  $< \sim 1\%$  of the pump energy available during the 7 ps interaction period, so the saturation is not due to pump depletion. The saturation of the power scattered from the pump beam is demonstrated to be only weakly dependent on time over the 3.5 ps period which we drive the scattering Langmuir wave by a second series of measurements with 0.5 ps duration seed pulses. The reduced duration seed produces similar amplification factors to the longer duration case when the seed power is low, and also demonstrates a reduction of the amplification factor as the seed power is increases to  $4.5 \times 10^8$  W. These measurements identify the saturation mechanism as purely electron kinetic because the saturation occurs in a time that corresponds to only one inverse wave frequency ( $\tau_{\text{pulse}} \sim \omega_{\text{iaw}}^{-1}$ ) for the ion acoustic

waves that are produced by the secondary decay of the Langmuir wave on longer time scales.

### **Comparison with VPIC Simulations**

Using VPIC [20] kinetic plasma simulations with a binary collision model to treat inter-particle Coulomb collisions [21], we have modeled the experiments in two spatial dimensions. In the simulations, the spatial domain is 1 mm in the pump laser direction and 0.5 mm in the transverse direction and the plasma is initialized with a uniform density profile having density, plasma composition, and initial temperature consistent with the experiments. The pump is a flat-top, long pulse launched from the left of the simulation domain with an average intensity  $1.02 \times 10^{14} \text{ W/cm}^2$ . The seed, launched from the right of the simulation domain, is Gaussian in time with 3.5 ps FWHM and has a central wavelength of 1200 nm; this pulse counter-propagates at 11 degrees relative to the pump direction as shown schematically in figure 5. Both pump and seed intensity profiles have random distributions of speckles of sizes equal to the diffraction limited spot sizes; the correlation time of the speckles in the seed is set equal to twice the observed amplification spectral width to ensure all components with significant amplification are included.

SRS initiates in the simulations when the seed and pump interact in the plasma and the amplification factor is found to decrease as the seed intensity increases, as observed experimentally. The electron distribution in the simulations also develops a supra-thermal component in the direction of the Langmuir wave, consistent with electrons being trapped by the wave. Moreover, as shown in figure 5, the simulations show evidence of nonlinear wave front bowing and electron plasma wave self-focusing

[16], as well as an associated reduction in the amplification factor at high intensity, as seen in the experimental observations, and find collisions significantly affect the observed amplification at low seed energy.

## **Summary**

The two primary results of this paper are: 1) the first observation of nonlinear saturation of scattering stimulated by a broad spectrum, short pulse seed undergoing Raman amplification with a small amplitude gain exponent; and, 2) quantitative agreement in amplification factor from experiments and first-principles, 2D PIC simulations of the electron kinetic effects. These results provide experimental benchmarks and computational tools for a model of stimulated scattering by multiple intersecting beams that can be used to optimize laser coupling in ignition experiments.

This work performed under the auspices of the U.S. Department of Energy by Lawrence Livermore National Laboratory under Contract DE-AC52-07NA27344.

## References

- [1] John D. Lindl, Peter Amendt, Richard L. Berger, S. Gail Glendinning, Siegfried H. Glenzer, Steven W. Haan, Robert L. Kauffman, Otto L. Landen, and Laurence J. Suter, *Physics of Plasmas*, 11, 339 (2004).
- [2] Y. Ping, R. K. Kirkwood, T.-L. Wang, D. S. Clark, S. C. Wilks, N. Meezan, R. L. Berger, J. Wurtele, N. J. Fisch, V. M. Malkin, E. J. Valeo, S. F. Martins, and C. Joshi, *Physics of Plasmas* 16, 123113 (2009).
- [3] R. K. Kirkwood, E. Dewald, C. Niemann, N. Meezan, S. C. Wilks, D. W. Price, and O. L. Landen, J. Wurtele, A. E. Charman, and R. Lindberg, N. J. Fisch, V. M. Malkin, and E. O. Valeo, *Phys. Plasmas*, 14, 113109 (2007).
- [4] V. M. Malkin and N. J. Fisch *Phys. Plasmas* 12 044507 (2004).
- [5] R. K. Kirkwood, D. S. Montgomery, B. B. Afeyan, J. D. Moody, B. J. MacGowan, C. Joshi, K. B. Wharton, S. H. Glenzer, E. A. Williams, P. E. Young, W. L. Kruer, K. G. Estabrook, and R. L. Berger, *Phys. Rev. Lett.* 83, 2965 (1999).
- [6] H. X. Vu, D. F. DuBois, and B. Bezzerides *PRL* 86, 4306 (2001).
- [7] K. Y. Sanbonmatsu, H. X. Vu, B. Bezzerides, D. F. Dubois, *Phys. Plasmas* 7, 1723, (2000) and K. Y. Sanbonmatsu, H. X. Vu, D. F. DuBois, and B. Bezzerides, *Phys. Rev. Lett.* 82, 932 (1999).
- [8] R. K. Kirkwood *et al.*, *Phys. Rev. Lett.* **77**, 2706 (1996).
- [9] J. C. Fernandez *et al.*, *Phys. Rev. Lett.* **77**, 2702 (1996).
- [10] C. G. R. Geddes, R. K. Kirkwood, S. H. Glenzer, K. Estabrook, B. I. Cohen, P. E. Young, C. Joshi, K. B. Wharton, *Phys. of Plasmas*, 10, 3422 (2003).
- [11] D. S. Montgomery, J. A. Cobble, R. J. Focia, R. P. Johnson, N. Renard-LeGalloudec, H. A. Rose, and D. A. Russell, *Phys. Plasmas* 9, 2311 (2002).
- [12] J. L. Kline, D. S. Montgomery, L. Yin, D. F. DuBois, B. J. Albright, B. Bezzerides, J. A. Cobble, E. S. Dodd, D. F. DuBois, J. C. Fernández, R. P. Johnson, J. M. Kindel, and H. A. Rose, H. X. Vu, W. Daughton, *Phys. Plasmas* 13, 055906 (2006).
- [13] P. Michel, et al., *Phys. Plasmas*, **16**, 042702 (2009).
- [14] D. E. Hinkel, et al., *Physics of Plasmas* **15**, 056314 (2008), L. Divol, [et al.](#), *Physics of Plasmas*, **15**, 056313 (2008), and references therein

- [15] L. Yin, B. J. Albright, K. J. Bowers, W. Daughton, and H. A. Rose, Phys. Rev. Lett. 99, 265004.
- [16] L. Yin, B. J. Albright, K. J. Bowers, W. Daughton, and H. A. Rose, Phys. Plasmas, 15, 013109 (2008).
- [17] V. Malka, C. Coulaud, J. P. Geindre, V. Lopez, Z. Najmudin, D. Neely, and F. Amiranoff, Rev. Sci. Instrum. 71, 2329 (2000); S. Semushin and V. Malka, ibid. 72, 2961 (2001).
- [18] M. M. Marinak, G. D. Kerbel, N. A. Gentile, O. Jones, D. Munro, S. Pollaine, T. R. Dittrich, and S. W. Haan, Phys. Plasmas 8, 2275 (2001).
- [19] W. L. Kruer, The Physics of Laser Plasma Interactions (Addison-Wesley Publishing Co., Redwood City, CA, 1988).
- [20] Bowers, et al., Phys. Plasmas, **15**, 055702 (2008).
- [21] T. Takizuka and H. Abe, J. Comput. Phys., 25, 205 (1977).

## Figure captions

- Figure 1      The geometry of the right half of an indirect drive ignition target is shown schematically in a) with the Raman scattered light produced by a single beam in the interior of the hohlraum and, its propagation path out across multiple entering beams, indicated, and b) the experimental geometry that emulates the intersection of one entering beam and the scattered Raman light on the electron kinetic time scale.
- Figure 2      Measurement of the transmitted spectrum of the short pulse seed for the case where the pump and plasma are present, as well as a case with the seed only (shown increased 10x for clarity in this plot) indicating substantial amplification and spectral narrowing of the seed by the Langmuir wave resonance in the plasma.
- Figure 3      A 1D slice through an image of the 0.5 mm spot of the seed beam where it overlaps the pump beam in the plasma, for the cases of figure 2 on the same scale, showing that the amplification occurs across the profile of the spot and is greatest near the center of the beam (43 x at 60 nm) where the pump intensity is highest, and also confirming that the amplified seed focal spot size is not significantly degraded.
- Figure 4      A series of experiments with varying incident seed energy are analyzed to determine the peak spectral amplification factor, and show that the amplification factor decreases significantly as the seed power is increased demonstrating a non-linear saturation of the scattering wave. The expected response of a linear wave and 2D VPIC simulations as discussed in the text.
- Figure 5      The geometry of the 2D VPIC simulations that includes a distribution of un-correlated  $f/10$  speckles in the pump and seed beams with the seed  $11^\circ$  from counter-propagating with the pump. The simulation results show the electrostatic wave amplitude,  $E_x$ , as the seed exits the plasma which demonstrated wave front bowing associated with the electron trapping that results in the observed non-linear wave response.

Figures

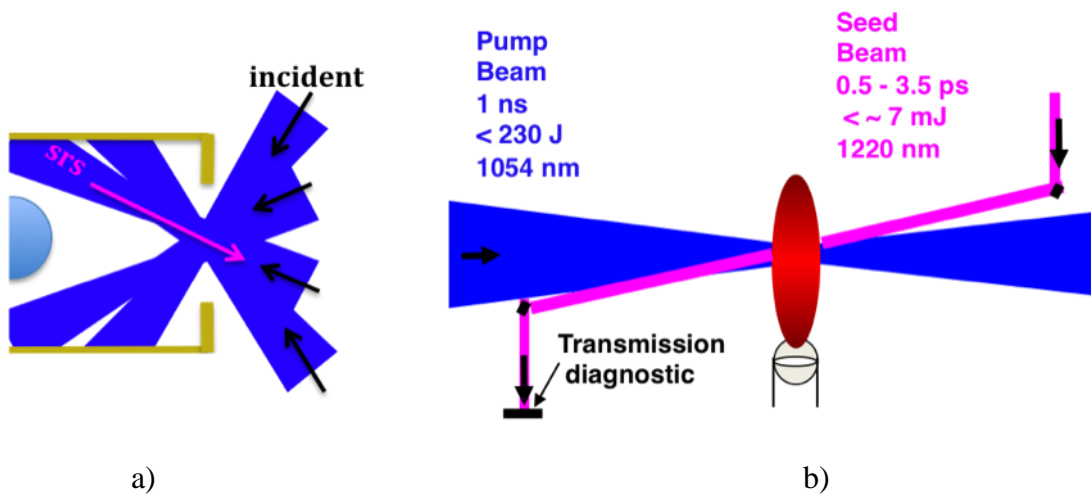


Figure 1

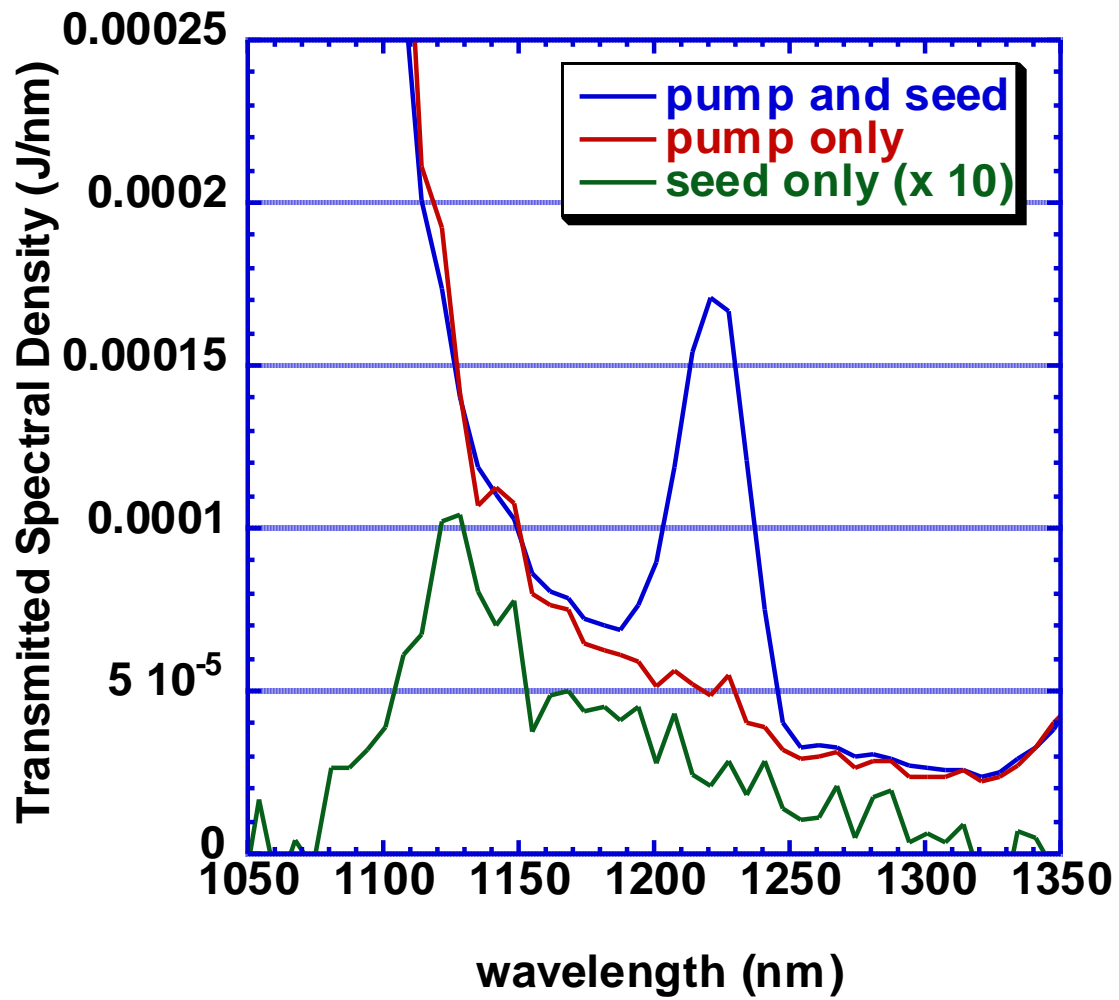


Figure 2



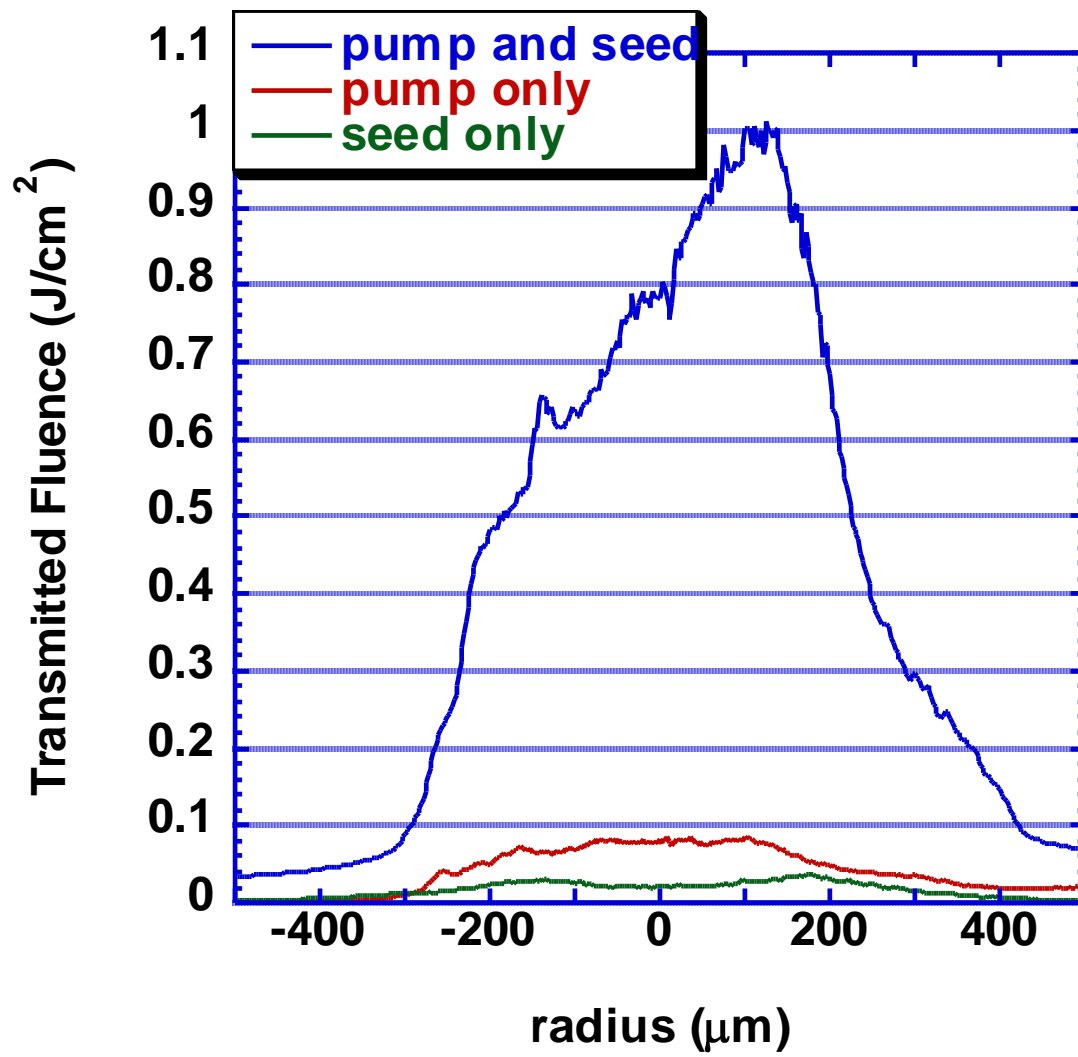


Figure 3

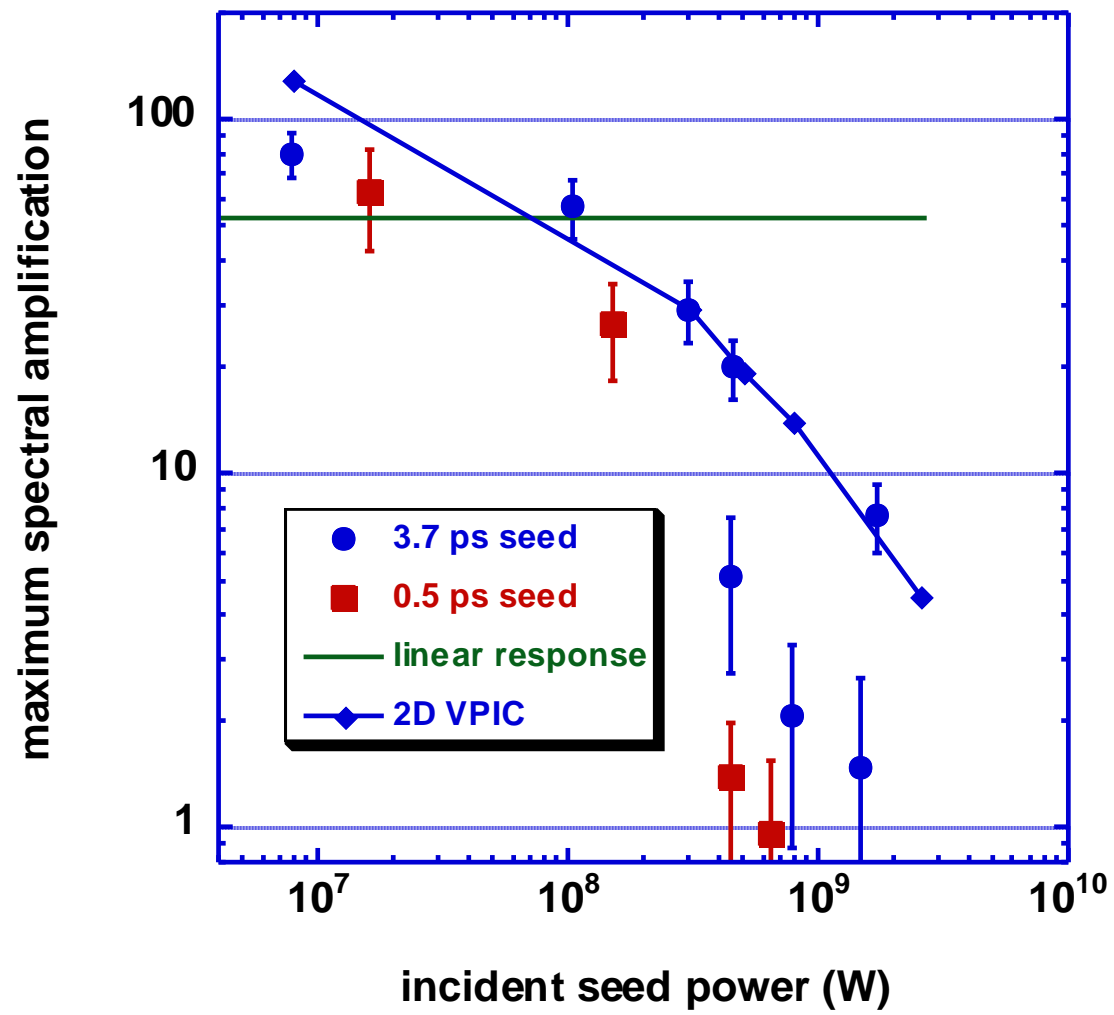


Figure 4

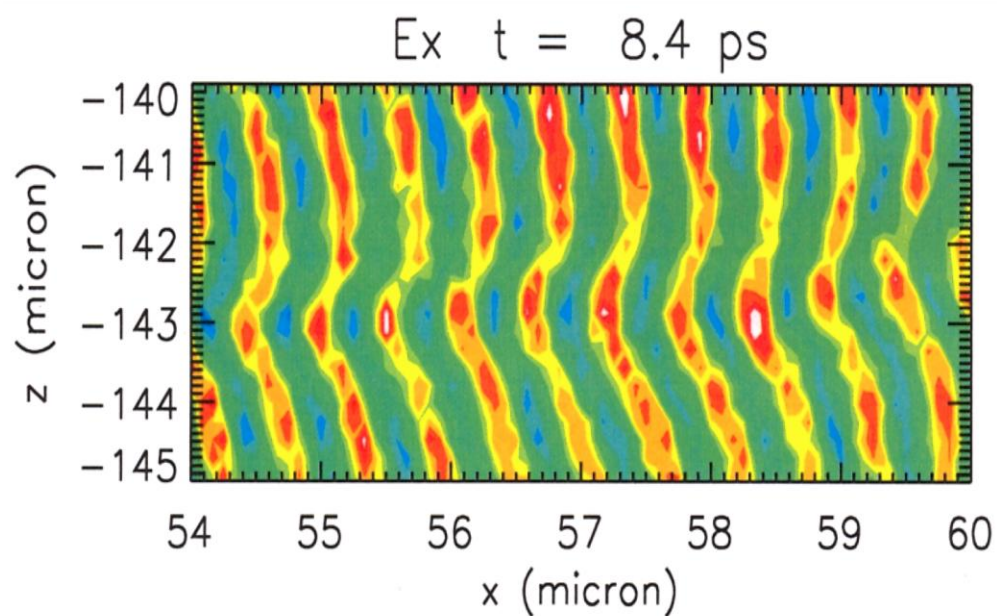
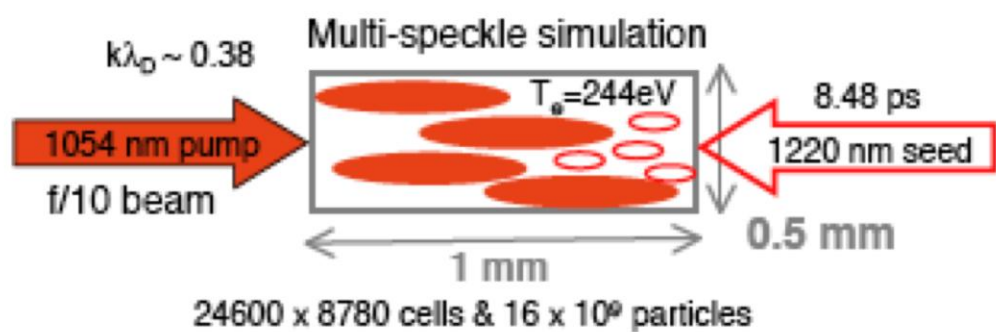


Figure 5